


MINIATURE HERMETIC ELECTRONIC OCTAL PLUGS

OCTAL PLUGS, COMMERCIAL EQUAL HERMETIC GLASS-TO-METAL SEALED (VACUUM / PRESSURE)


PART NUMBERING SYSTEM

1062 FM - 88 - RP 9


Pin Dia. .090" Dia.
Pin Termination
Pin Layout
Body Design
Body Diameter





PATTERN 88





PATTERN 99



PATTERN 11

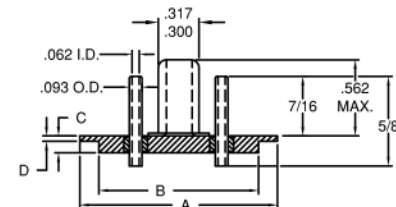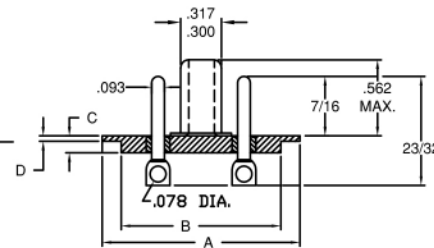

PART NO.	AØ	BØ	C	D	PATTERN No.	PART NO.
1062 M-88-RP9	1.062	--	.125	--	88	1062 M-88-TRS9
1062FM-88-RP9	1.062	.995	.125	.080	88	1062FM-88-TRS9
1062FM-99-RP9	1.062	.995	.125	.080	99	1062FM-99-TRS9
1062FM-11-RP9	1.062	.995	.125	.080	11	1062FM-11-TRS9
1235FM-88-RP9	1.235	1.062	.125	.045	88	1235FM-88-TRS9
1235FM-99-RP9	1.235	1.062	.125	.045	99	1235FM-99-TRS9
1235FM-11-RP9	1.235	1.062	.125	.045	11	1235FM-11-TRS9
1250FM-88-RP9	1.250	1.175	.125	.040	88	1250FM-88-TRS9
1250FM-99-RP9	1.250	1.175	.125	.040	99	1250FM-99-TRS9
1250FM-11-RP9	1.250	1.175	.125	.040	11	1250FM-11-TRS9

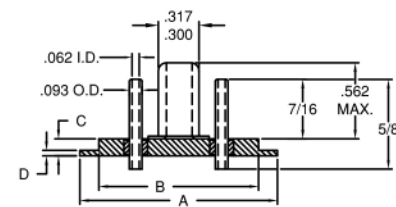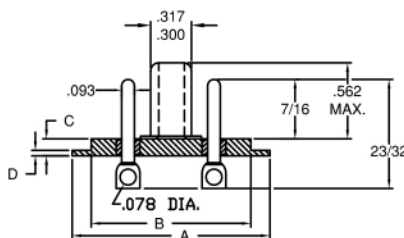

PART NO.	AØ	BØ	C	D	PATTERN No.	PART NO.
1062 M-88-RP9	1.062	--	.125	--	88	1062 M-88-STR9
1062FR-88-RP9	1.062	.995	.125	.080	88	1062FR-88-STR9
1062FR-99-RP9	1.062	.995	.125	.080	99	1062FR-99-STR9
1062FR-11-RP9	1.062	.995	.125	.080	11	1062FR-11-STR9
1235FR-88-RP9	1.235	1.062	.125	.045	88	1235FR-88-STR9
1235FR-99-RP9	1.235	1.062	.125	.045	99	1235FR-99-STR9
1235FR-11-RP9	1.235	1.062	.125	.045	11	1235FR-11-STR9
1250FR-88-RP9	1.250	1.175	.125	.040	88	1250FR-88-STR9
1250FR-99-RP9	1.250	1.175	.125	.040	99	1250FR-99-STR9
1250FR-11-RP9	1.250	1.175	.125	.040	11	1250FR-11-STR9

MATERIAL: STANDARD IS CRS BODY AND 52 NICKEL ALLOY PINS.

STANDARD FINISH IS BRIGHT TIN PLATED BODY AND PINS, OTHER FINISHES AVAILABLE ON REQUEST.

GENERAL SPECIFICATIONS

AIR LEAKAGE: 1×10^{-8} CM³/SEC AT 15psi

INSULATION RESISTANCE: 10,000 megohms AT 500VDC

OPERATING TEMPERATURE: -85°F TO +257°F (-65°C TO +125°C)

CURRENT RATING: SIZE 12: 17 AMPS

TOLERANCES: DECIMAL $\pm .005$; FRACTIONAL $\pm 1/64$

Detoronics Corporation

13071 ROSECRANS AVE, SANTA FE SPRINGS, CA 90670

TELE: (626) 579-7130 FAX: (626) 579-1936

www.detoronics.com